

IP6000AOGI—Agent Operated Gate Intercom


The IP6000 is an ADA compliant, hardened, vandal-resistant, full-duplex, intelligent hands-free emergency assistance phone that provides VoIP (Voice over Internet Protocol) communications utilizing SIP (Session Initiation Protocol). The rugged stainless steel front panel with sealed speaker, microphone and activation button ensures long product life and provides assurance that vital calls will get through under the harshest of conditions. The IP6000 is programmed via a web browser or is remotely supervised, tested and programmed using an Emcom Systems' EmVista Maintenance Station.

Advantages

- Full Duplex
- Wide Operating Temp Range
- 1.5" Tamper-Resistant Piezo Button
- 2 Visual Call Indicators
- Submersible Speaker
- Metal Braille Plate
- Background Noise Reduction Using DSP
- Remote Programming and Volume Adjust Via Web
- Auxiliary Contact Closures
- 3 Port IP Switch for Daisy Chaining
- 2 Year Warranty



Dimensions

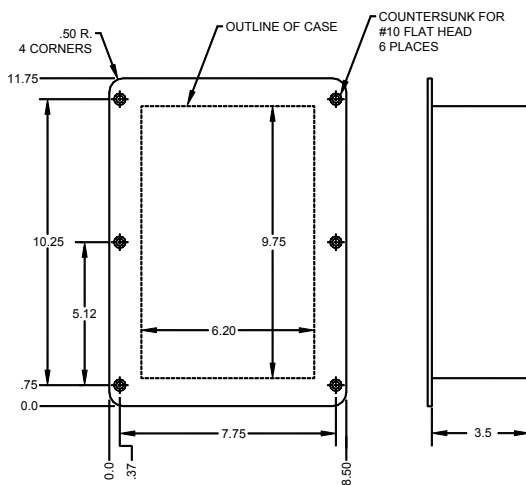

Specifications

Dimensions:	11.75" H x 8.5" W x 3.5" D
Panel:	12 Ga. (.102") Brushed SS
Weight:	8 lbs.
Connectors:	2 RJ-45, 2 Aux. Contacts 1 Power
Operating Temp:	-30° C to +55° C (-22°F to +131°F)
Power:	3.4 Watts at Full Volume 12 to 54 VDC, 48 VDC PoE
2 Aux. Contacts:	120mA - 250VAC Rating, Opto-isolated
Freq. Response:	300Hz - 3400Hz
MTBF:	Greater than 90,000 Hours
Certifications:	UL60950-1 CSA C22.2 No. 60950-1

127 Route 206 South, STE 27
Trenton, NJ 08610

Contact: info@emcomsys.com
+1 (609) 585-5500
www.emcomsys.com

The dynamic nature of this product design dictates that the information contained in this document be subject to change without notice. Emcom assumes no responsibility for errors and/or omissions contained herein.