



EMI32 - Low REN, High Efficiency Ringer


The EMI32 is loud, highly efficient, rugged, telephone line ringer. Louvered openings on the front and sides of the unit permit maximum sound output contained in a highly vandal-resistant enclosure. Dust filters behind the louvers impede harmful elements from entering the unit. The two external mounting tabs allow for easy installation to any surface. Ringer housing is secured to back mounting box with four captive, spanner bit screws.

Advantages

- Low REN Activation
- High Output Ringer
- Built-in 1 mf Blocking Capacitor
- Ruggedized Enclosure
- 2 Year Warranty



Dimensions

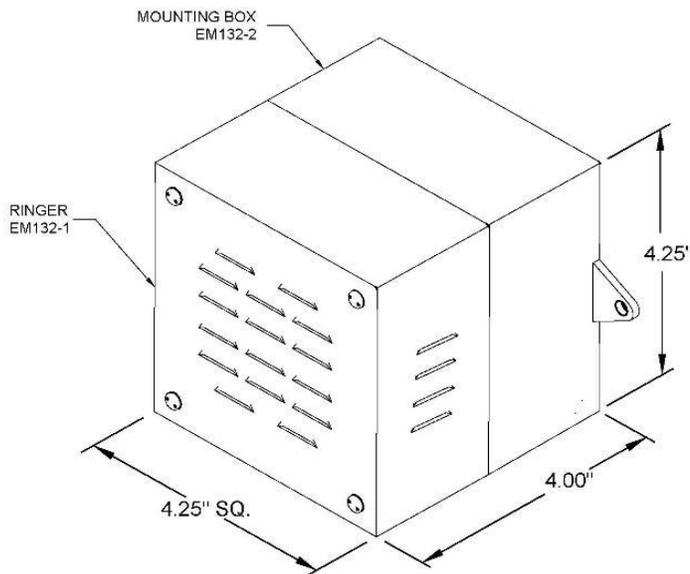

Specifications

Dimensions:	4.25" H x 5" W x 4" D
Mtg. Holes:	5" Centers
Ringer Box Material:	18 Ga Stainless Steel
Mounting Box Material:	18 Ga Stainless Steel
Weight:	2 lbs.
Connections:	1 RJ-11, or Terminal Strip
Operating Temp:	-20° C to +50° C (4° F to +122° F)
Output:	90dB @ 2 feet with 90 VRMS 20 Hz Input
REN:	.4A, .8B

29 MAY 2025

PO Box 59
Windsor, NJ 08561

92 N Main St., Bldg. 18A
Windsor, NJ 08561

Contact: info@emcomsys.com
+1 (609) 585-5500
www.emcomsys.com

The dynamic nature of this product design dictates that the information contained in this document be subject to change without notice.

Emcom assumes no responsibility for errors and/or omissions contained herein.