



# IP6000AOGI—Agent Operated Gate Intercom


The IP6000AOGI is an ADA compliant, hardened, vandal-resistant, full-duplex, intelligent hands-free emergency assistance phone that provides VoIP (Voice over Internet Protocol) communications utilizing SIP (Session Initiation Protocol). The rugged stainless steel front panel with sealed speaker, microphone and activation button ensures long product life and provides assurance that vital calls will get through under the harshest of conditions. The IP6000AOGI is programmed via a web browser or is remotely supervised, tested and programmed using an Emcom Systems' EmVista Maintenance Station.

## Advantages

- Full Duplex
- Wide Operating Temp Range
- 1.5" Tamper-Resistant Piezo Button
- 2 Visual Call Indicators
- Submersible Speaker
- Metal Braille Plate
- Background Noise Reduction Using DSP
- Remote Programming and Volume Adjust Via Web
- Auxiliary Contact Closures
- 3 Port IP Switch for Daisy Chaining
- 2 Year Warranty



## Dimensions

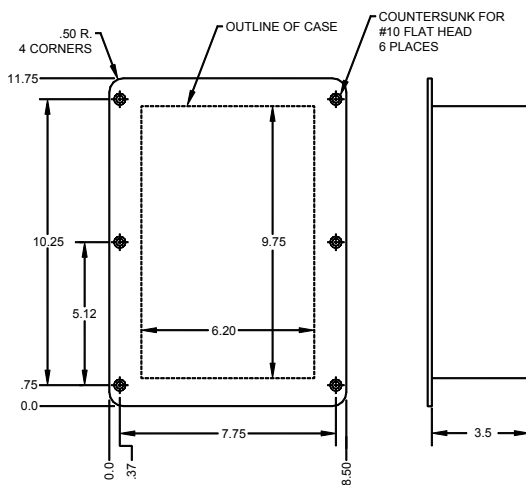

## Specifications

Dimensions:	11.75" H x 8.5" W x 3.5" D
Panel:	12 Ga. (.102") Brushed SS
Weight:	8 lbs.
Connectors:	2 RJ-45, 2 Aux. Contacts 1 Power
Operating Temp:	-30° C to +55° C (-22°F to +131°F)
Power:	3.4 Watts at Full Volume 12 to 54 VDC, 48 VDC PoE
2 Aux. Contacts:	120mA - 250VAC Rating, Opto-isolated
Freq. Response:	300Hz - 3400Hz
MTBF:	Greater than 90,000 Hours
Compliance:	UL60950-1 CSA C22.2 No. 60950-1 NEMA 4 (When secured to NEMA 4 Housing)
Compatibility:	Mitel Cisco Genetec

PO Box 59  
Windsor, NJ 08561

92 N Main St , Bldg. 18A  
Windsor, NJ 08561

Contact: info@emcomsys.com  
+1 (609) 585-5500  
www.emcomsys.com

The dynamic nature of this product design dictates that the information contained in this document be subject to change without notice. Emcom assumes no responsibility for errors and/or omissions contained herein.