



IP860 Rugged, IP Intercom


The IP860 is a hands-free, full duplex, intelligent VoIP intercom designed to be installed to industry standard 2-gang electrical box. The stainless steel face plate contains red and green indicators so users see the call progress. This all-in-one unit communicates via SIP (Session Initiation Protocol) and can be powered via PoE. The IP860 is programmed via a web browser or is remotely supervised, tested and programmed using an Emcom Systems' EmVista Maintenance Station.

Advantages

- Full Duplex
- 2 Visual Call Progress Indicators
- 1" Metal Piezo Button
- Speaker Round, 2", Mylar
- Background Noise Reduction Using DSP
- Remote Programming and Volume Adjust Via Web Browser or EmVista Maintenance
- 2 Year Warranty



Dimensions

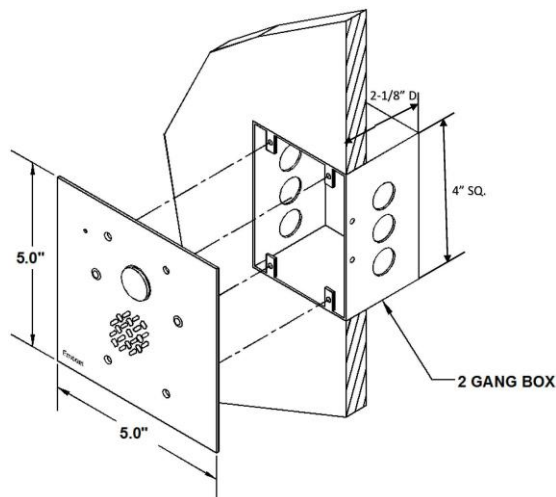

Specifications

Dimensions:	5.0" Sq. x 2.0" D
Panel:	14 Ga. (.078") Brushed SS 2 Gang Box HUBBELL RACO 683
Weight:	1.5 lbs.
Connectors:	1 RJ-45, 1 Power
Operating Temp:	-30° C to +55° C (-22°F to +131°F)
Power:	PoE or 30 – 60 VDC
Freq. Response:	300Hz - 3400Hz
MTBF:	Greater than 90,000 Hours
Compliance:	IP54
Compatibility:	Mitel Cisco Genetec c

92 North Main Street, #18A
Windsor, NJ 08561

Contact: info@emcomsys.com
+1 (609) 585-5500
www.emcomsys.com

The dynamic nature of this product design dictates that the information contained in this document be subject to change without notice.